



DDA Wing Gate




Outline Specification: EDSUK Wing Gate T9104

Height	1030mm.
Leaf Width	900mm
Body Width	230mm
Overall Width	1130mm
Construction & Finish	Natural finish Stainless Steel, c/w Black Granite Top and plexi-glass (standard) or laminated glass leaf option.
Safety	Supplied with failsafe built-in protection. Additional safety such as photocells, interactive IR detectors can be provided.
Drive Unit	Electro-Mechanical, c/w manual opening override.
Controls	Microprocessor controlled drive unit which can interface to any standard control system: Switch Operation, Intercom, Token, Barcode, RFID Radio Frequency, Radio Keyfob Transmitter, Proximity Card, Proximity Tag, Magstripe Card Reader, Digital Keypad, Biometric Fingerprint or Hand Geometry Readers, Building Management Systems, etc.
Power	Single Phase 230vac (UK) Supply both 50/60 Hz.

EDS Wing Gate T9104 is a bidirectional motorised swing turnstile. It is composed of a stainless steel structure with a granite top cover.

Wing features an emergency panic release system. It is also suitable for wider passageways as it is available in a double configuration with synchronised automation. Wing allows easy access for wheelchairs where other turnstiles might cause problems.

Images, Technical Specification & Notes:

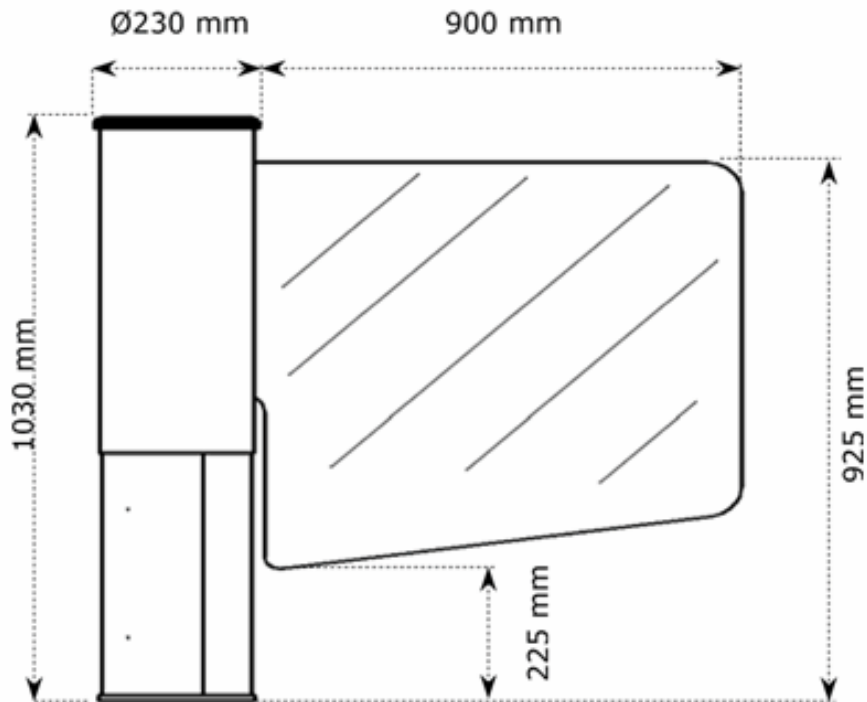



Optional Features

Barrier Rail Infill Panels

Glass, Chrome, Stainless Steel or Wire sections used for infill between turnstiles & gates and other structures.



Switch & Timer Operation

Push button, Desktop Switch, Keyswitch, & 24hr timer for automatic mode operation.




Intercom Control

Audio, Video & Audio, GSM Intercom operated over a mobile phone SIM card, Emergency Phone.



Photo Infra-Red Beams

Additional photo-beams can be installed to provide commands such as safety, opening, closing and alarm signals.



Access Control Integration

Keypads, Magnetic Swipe Card, Barcodes, Proximity Card, Photo ID, RFID & Radio Remote Control Technology, Biometric Controls, can all operate the system.



UPS – Battery Backup Facility

Battery back-up facility to operate the system in the event of a power fail and provides a level of mains power filtering.



Indicator Light Controls

LED indicator lights and For user feedback and information signs and bespoke directional signs etc.



Token Operation

Simple token operation with slotted token, can be customised with your organisations logo or name.

