
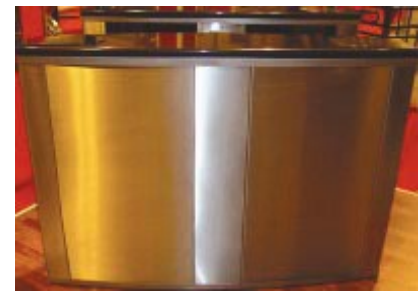
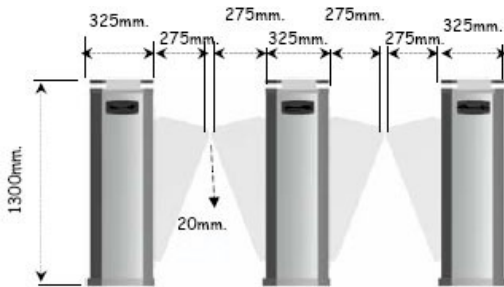


# eds Turnstile - Speedgates

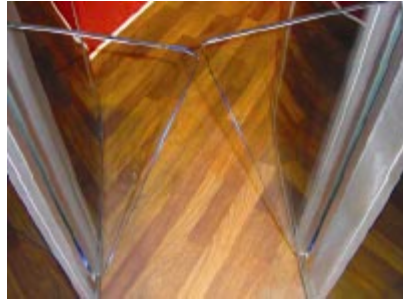

EDS Glass Leaf Speed gates come in a range of widths, designs, and specifications; and with many different control mechanisms. Where the width of your site exceeds the standard sizes, several Bollards can be installed adjacent to each other, with linked controls to operate simultaneously. Several methods of safety are incorporated into the system as standard.

The speed gate, is the ultimate in preventing access into your site, it provides high security coupled with a very visible deterrent and can be installed in a variety of different applications in use for manned or unmanned sites. The turnstiles are robust and manufactured from stainless steel, glass and granite all complement each other.

Construction	All body stainless steel. The central and the front panels are 304 grade DIN grade satin stainless steel, lateral panels are standard grid patterned stainless steel.
Top Lid	Standard top cover is black granite 20mm. Different granite patterns and colours. (Options. Stainless steel or wood), available on request
Sizing	Pedestal Width 325mm Length 1465 (front to back), Height 1300 to granite top Glass Leaf 275mm (each) two per unit. Total overall width for a single unit 600mm for a double 875. For one lane two single units are required for two lanes one double and two singles are required. See layout diagram.
Infill Options	Fixed glass panels can be used to close off spaces either end of the Turnstiles, to filter traffic in the proposed direction. All panels additional and subject to final site survey.

- High Security - Visible Deterrent
- Sleek Design
- Fast Operation
- Fast throughput of people
- Integrate into Any Access Control System
- Designed with Security Built-In

A state of the art control system monitors the kerb for precise location and has numerous advanced safety features built-in, the control system ensure the Bollard(s) operates at optimum levels and rises and falls with smooth operation.

- \* The main movement mechanism is provided by a DC motor, controlled by microprocessor.
- \* The wings closed in normal mode, opening fast when the authorisation is received for the passage, i.e card accepted.
- \* Safety features built-in to prevent persons being trapped when the wings are closing, reopening if activity detected.
- \* The passages can be counted one by one, for counting in and out - optional extra.
- \* Indicator lights are built-in as standard, placed on both sides of the front panels and embedded on top granite under an acrylic glass, (Green arrow or the circle red sign). Optionally, a decorative steel passage status indicator can be added to the system onto the top lid.
- \* In case of emergency, the system opens the wings and indicators illuminate green. This feature can also be activated during power failures, using the built-in emergency battery backup.