

EDSUK Trackless Bi-folding Speed Gate



Available in
varying
Widths,
Heights & Leaf
configurations

Specification

Details


Finishing	Galvanized & Powder coated
Options	Width, Height & Infill
Lane Widths	4000mm to 15000mm
Power	Single phase 16 A 220 V +/- 10%, both 50/60 Hz or Three Phase Available.
Drive	Motor Driven
Operating Temperature	-25 to +55 degrees Centigrade.

EDSUKBSG100 Is our very own bi-folding trackless Speed-gate is the ultimate in preventing access into your site, it provides high security coupled with a very visible deterrent and can be installed in a variety of different applications in use for manned or unmanned sites.


- PLC controlled rapid movement for quick bi-folding operation.
- Options of independent leaf operation.
- Can operate standalone or part of an Access Control System.
- Various infill options offered.
- Full compliant with safety devices installed.



EDSUK Trackless Bi-folding Speed Gate

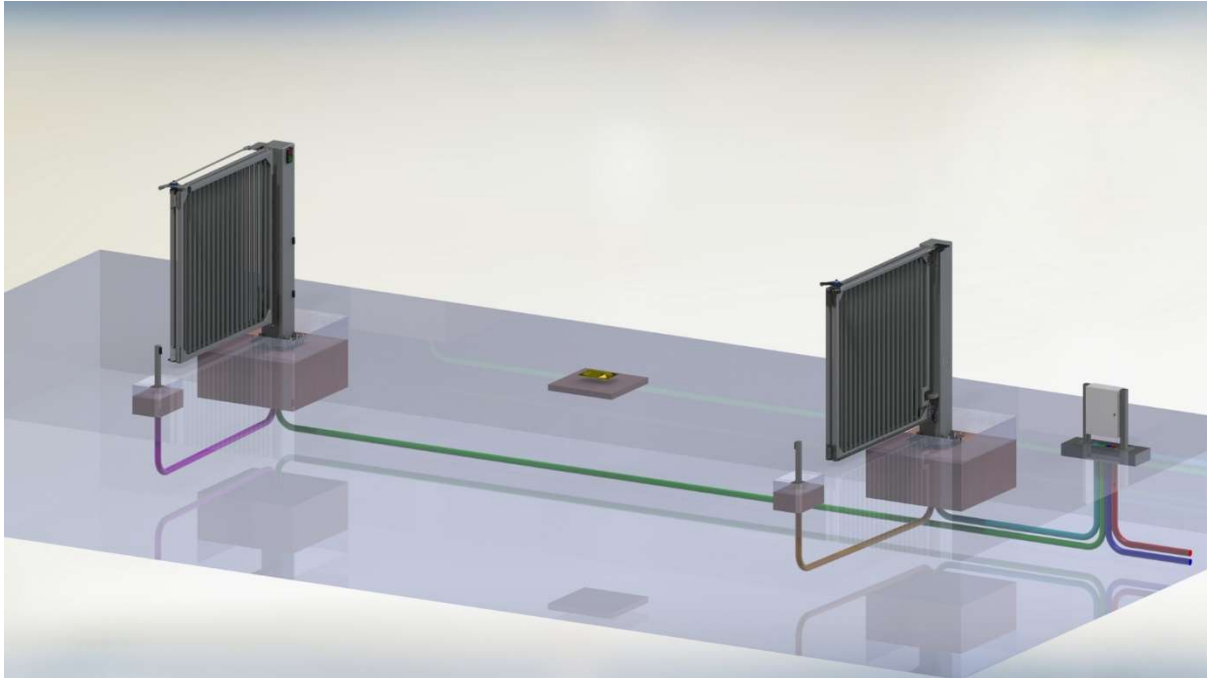

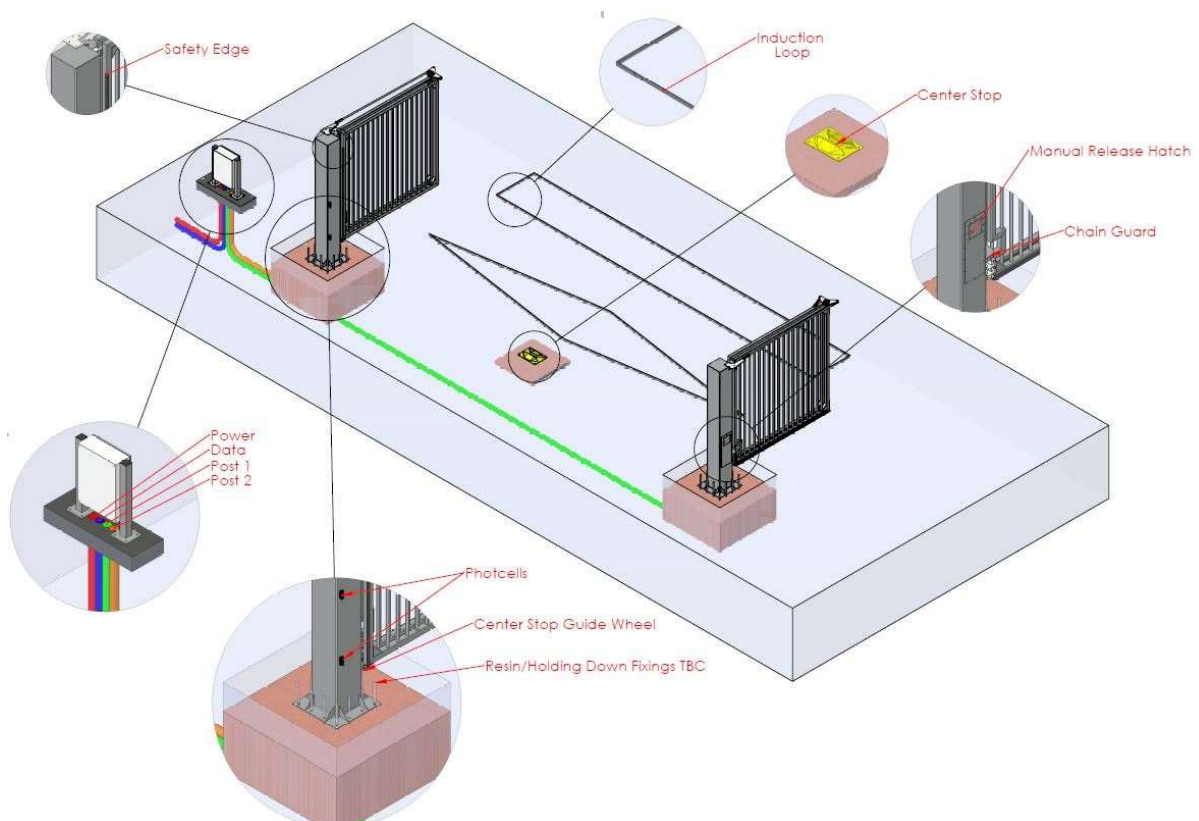





Overall Installation



EDSUK Trackless Bi-folding Speed Gate



Options

 <p>Switch Controls</p>	 <p>Intercom access</p>
 <p>Swipe card readers/keyfob etc</p>	 <p>Traffic light/management integration</p>
 <p>Photocell/Opening sensors</p>	 <p>UPS or other power backup</p>

EDSUK Trackless Bi-folding Speed Gate



EDS (Electrical-Data-Security) Ltd, Waterside Business Park
1649 - 1651 Pershore Road, Kings Norton, Birmingham, West Midlands, UK, B30 3DR

e: sales@edsuk.com | w: www.edsuk.com

This datasheet is not intended to form any part of a contract. EDS reserves the right to change the specification or appearance of any of its products.